

If the pattern has a double line around it, the seam allowances are included.

**Note:** By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.

**Important!** Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.

Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.

## 2337 Dress tunic with wrinkles

Recommendations on fabric: natural/mixed fabric suitable for dresses.

### CUTTING:


The word, "beam" used on some patterns means "straight of grain". Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.

You will also need: fusible interfacing.

Seam allowances: Seam allowance along hem of garment – 2.0 cm, seam allowance along hem of sleeve 1.5 cm. Other seams – 1.0 cm

### Main fabric:

1. Center back - cut 2
2. Side back - cut 2
3. Center upper front - cut 4
4. Center lower front – cut 1 on fold
5. Side front - cut 2
6. Back neck facing - cut 2

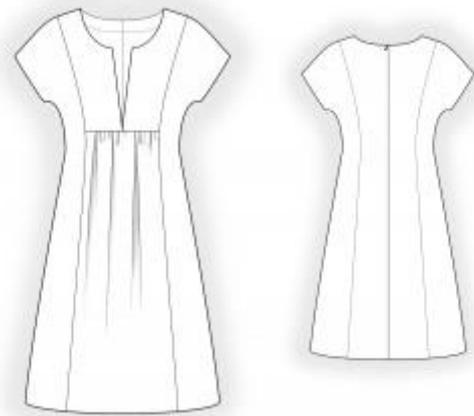

Fusible interfacing:

1. Back neck facing - cut 1
2. Center upper front - cut 2

INSTRUCTIONS:

1. Apply fusible interfacing.
2. Sew side backs to center back, press towards center and serge. Sew center back seam. Serge seam and press towards left.
3. Sew center edles of upper center fronts (the small area). Press seam apart.
4. Sew a gathering stitch along the upper edge of center lower front and gather fullness. Sew lower front to upper outer part, press towards top.
5. Serge lower edge of the inner part and press. Pin the piece onto outer upper front, right side down and sew opening and neckline. Seam Allowance trim away corners, clip into curves. Fold away inner part onto wrong side, edges press. Topstitch the lower edge into the seam between the upper and lower parts (stitch in the ditch). Treat as one piece in the future.
6. Sew side fronts to front, press towards center and serge.
7. Sew side seams, press seams towards back and serge.
8. Serge outer edge of back facing. Pin facing onto back right side down and sew neckline. Start and stop stitching exactly at the shoulder seam. Clip seam allowances, fold facing onto wrong side and press.
9. Sew shoulder seams, inserting Front between Back and Back Facing. Serge seams and press towards back.
10. Serge hem of garment and hem of sleeve, press onto wrong side and topstitch.

Congratulations, your dress is ready! :)