

If the pattern has a double line around it, the seam allowances are included.

Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.

Important! Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.


Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.

7090 Beret with visor

Recommendations on fabric: cotton, wool, dense silk, or whipcord.

You will also need: lining, fusible interfacing.

CUTTING:

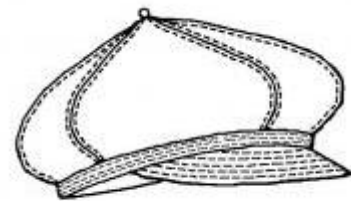

The word, "beam" used on some patterns means "straight of grain". Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.

Seam allowances: all seams - 1 cm.

Main fabric:

1. Gusset – cut 6
2. Band – cut 1
3. Visor – cut 2
4. Button cover – cut 1

Lining:

1. Gusset – cut 6

Fusible interfacing:

1. Band – cut 1
2. Visor – cut 2

INSTRUCTIONS:

1. Apply fusible interfacing to listed pieces.
2. Sew gussets together, placing them right side inwards. Topstitch along connecting seams at 0.2 cm from the seam. Sew center seam, aligning gussets exactly in the center. Topstitch along the seam.
3. Sew lining details the same way as main fabric details. Set lining into the head, matching seams on main fabric and lining. Turn inside lower edges of lining and main fabric and topstitch at 0.2 cm from the edge.
4. Place visors details right sides together and stitch on outer contour. Cut allowance close to the seam. Turn visor right side out, finish the seam, press. Topstitch visor with 0.5 cm parallel stitches. Level inner edge of the visor.
5. Sew band into ring and press apart the seam. Fold band in half lengthwise with its right side out, turn edges (separately) and baste.
6. Set the peak into the band, matching centers. Tack the visor and baste band edge. Topstitch the band with parallel stitches. Make first stitch at 0.2 cm from the edge, catching the peak. Gap between stitches is 0.5 cm.
7. Place band and head right sides together, baste, evenly distributing the ease and sew. Remove baste threads.
8. Cover button with fabric and sew it in the center of the head.

Congratulations, your beret is ready! :)